

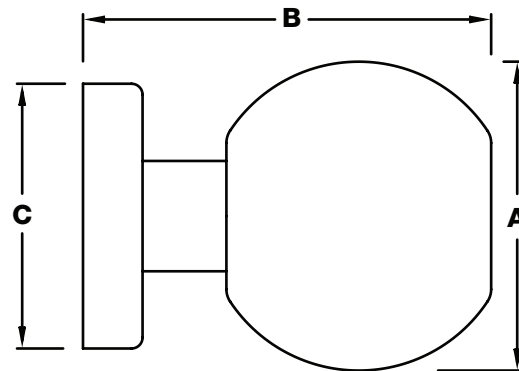
RESIDENTIAL KNOB SPECIFICATIONS


STAFFORD

GANYON

BARRETT

LINDINGHAM

WEBLEY


Styles	A (in)	B (in)	C (in)
Stafford	2.37	2.82	2.95
Ganyon	2.37	2.81	2.95
Barrett	2.12	2.81	2.95
Lindingham	2.23	2.73	2.95
Webley	2.34	2.57	2.95

Dimensions are for outside knob, passage function, 1-3/8" inch thick door.

Finishes	105 Polished Brass	119 Satin Nickel	150 Tuscan Bronze
Stafford	•	•	•
Ganyon		•	•
Barrett	•	•	
Lindingham		•	•
Webley	•	•	•

Knob Specifications & Options

ANSI Grade:	Meets Grade 2 standards
Cylinder:	KW1, SC1 available, 5 pin
Keying:	KA3 or as specified. Master key, construction key available
Latch:	2-3/8" or 2-3/4", 1/2" throw
Strike:	2-1/4" Full rim for entry, 2-1/4" full lip for interior, T and ASA available
Door Preparation:	Cross bore 2-1/8", edge bore 1", 1" x 2-1/4" latch mortise, backset 2-3/8" or 2-3/4"
Door Thickness:	1-3/8" to 1-3/4"
Handing:	Reversible
UL Listed:	90 Minute fire-rated available
Chassis:	Cylindrical
Faceplate:	2-1/4" Round corner, drive-in available
Warranty:	Lifetime mechanical, 10 year finish

Functions & Operation

Passage (F75)	Both knobs always free.
Privacy (F76)	Both knobs locked or unlocked by turn button inside. Outside knob unlocked by emergency key.
Entry (F81)	Both knobs locked or unlocked by key outside or turn button inside.
Dummy	For doors where only a pull is required. Does not operate a latch.



BRINKS
HOME SECURITY™

Brink's trademark & copyright works are used with permission.

Hampton Products International Corp.
50 Icon, Foothill Ranch, CA 92610-3000 USA
email: info@hamptonproducts.com
www.brinksppr.com • 1-800-562-5625

©2015 Hampton Products International Corp. 50000-00189_REVA 11/15