



BRINKS
HOME SECURITY™

PUSH PULL ROTATE
DOOR LOCKS™


RESIDENTIAL DEADBOLT SPECIFICATIONS



ALMARRION

AMBERHALL

WELDON

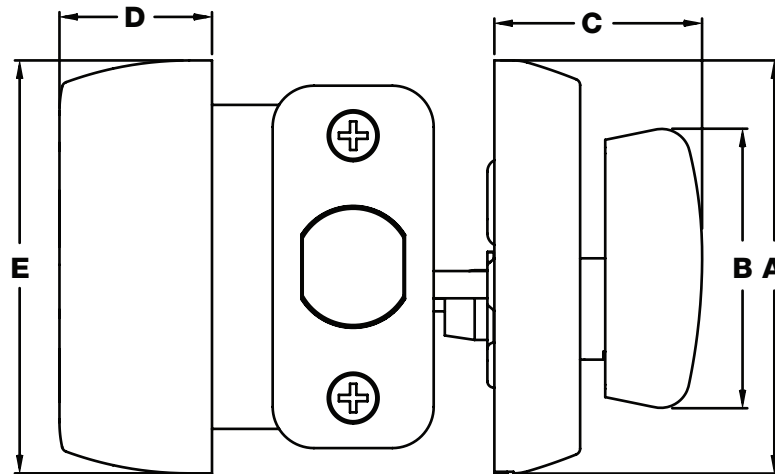

Styles	A (in)	B (in)	C (in)	D (in)	E (in)
Almarrion	2.56	1.73	1.55	0.95	2.56
Amberhall	2.56	1.73	1.55	0.95	2.56
Weldon	2.56	1.73	1.55	0.86	2.56



Finishes	105 Polished Brass	119 Satin Nickel	125 Polished Chrome	150 Tuscan Bronze
Almarrion	●	●	●	●
Amberhall	●	●		●
Weldon	●	●	●	●

Deadbolt Specifications & Options

ANSI Grade:	Meets Grade 2 standards
Cylinder:	KW1, SC1 available, 5 pin
Keying:	KA3 or as specified. Master key, construction key available
Latch:	Adjustable 2-3/8" or 2-3/4", 1" throw, steel
Strike:	2-3/4" Square corner
Door Preparation:	Cross bore 2-1/8", edge bore 1", 1" x 2-1/4" latch mortise, backset 2-3/8" or 2-3/4"
Door Thickness:	1-3/8" to 1-3/4"
Handing:	Reversible
UL Listed:	90 Minute fire-rated available
Chassis:	Cylindrical
Faceplate:	2-1/4" Round corner, drive-in available
Warranty:	Lifetime mechanical, 10 year finish

Functions & Operation

Single Cylinder Deadbolt (E0152)	Deadbolt operated by key outside and thumbturn inside.
---	---



Brink's trademark & copyright works are used with permission.

Hampton Products International Corp.
 50 Icon, Foothill Ranch, CA 92610-3000 USA
 email: info@hamptonproducts.com
 www.brinksppr.com • 1-800-562-5625

©2015 Hampton Products International Corp. 50000-00190_REVB 12/15